


Aesthetic design, easy montage and use...

## FEATURES

User friendly and designed according to EN 54-11, resettable with high technology user friendly accessories.

- Compatible with EN 54-11
- Compatible with surface and flush mounting
- Compatible with all conventional fire alarm panels
- User friendly
- IP22D protection class
- Optional protection cover
- Easily resettable
- High and stable operating performance

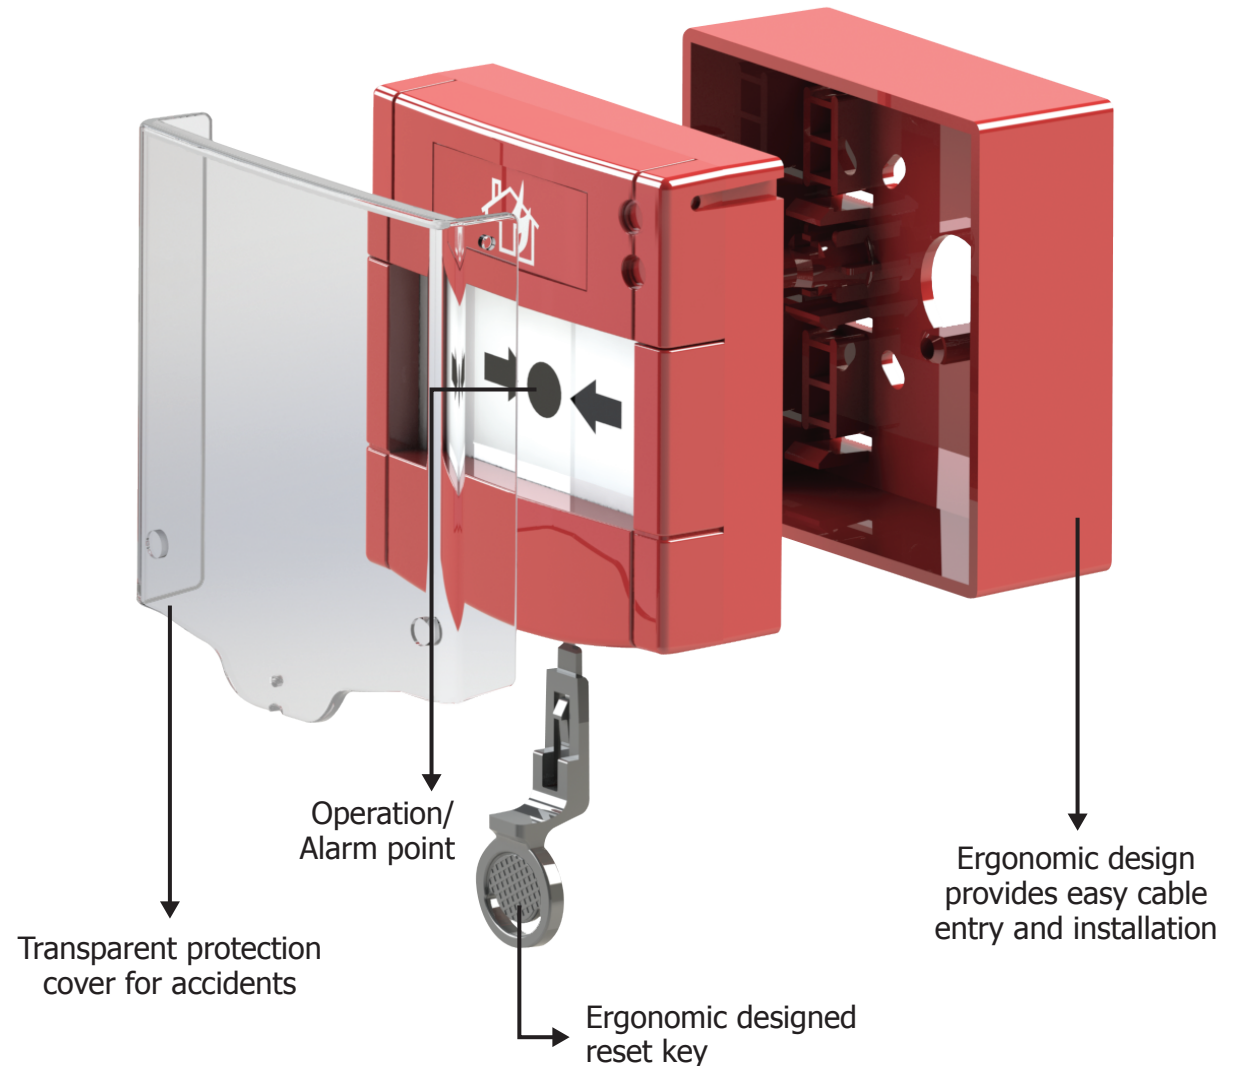

Aesthetic design, easy montage and use...

#### TECHNICAL SPECIFICATION

<b>Operating Voltage:</b>	10 - 30V DC
<b>Quiescent / Alarm Current:</b>	0A / 60 mA max.
<b>IP Protection Class:</b>	IP22D
<b>Color:</b>	Red
<b>Weight:</b>	140 gr
<b>Dimension:</b>	87 x 91 x 58 mm
<b>Operating Temperature:</b>	(-10°C) - (+55°C)
<b>Storage Temperature:</b>	(-30°C) - (+60°C)
<b>Relative Humidity:</b>	%0-95


#### MODELS

Product Code	Description
<b>ML-2710</b>	Maxlogic Conventional Manual Call Point, Resettable

#### ACCESSORY

Product Code	Description
<b>ML-0710</b>	Maxlogic Manual Call Point Protective Cover

#### CABLE CONNECTION

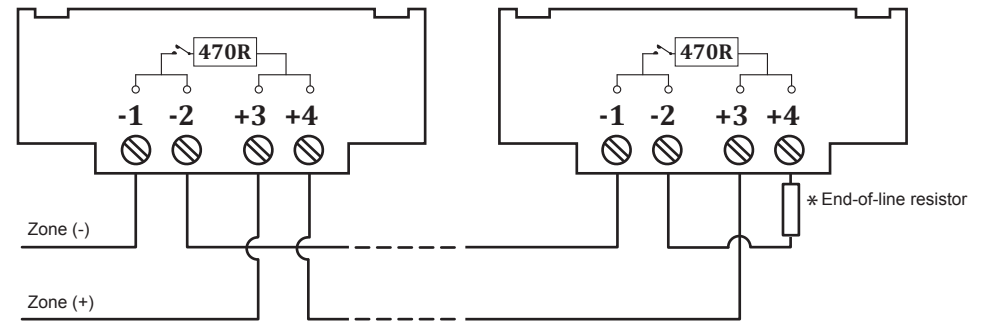

\* Resistor value is mentioned on panel. (MG / ML - 6K8)

**Against to fire hazards, protecting your life and properties is serious principle for Mavili Elektronik. Mavili Elektronik has been generating confidence for since 1987.**