


Aesthetic design, easy montage and use...

## FEATURES

Easy to use, innovative test key designed according to EN 12094-3, advanced technology resetting function and the features of the extinguishing hand release button having practical accessories are below.

- Compatible with EN 12094-3
- Compatible with surface and flush mounting
- Compatible with all conventional extinguishing panels
- User friendly
- IP22D protection class
- Protection cover
- Easily resettable
- High and stable operating performance

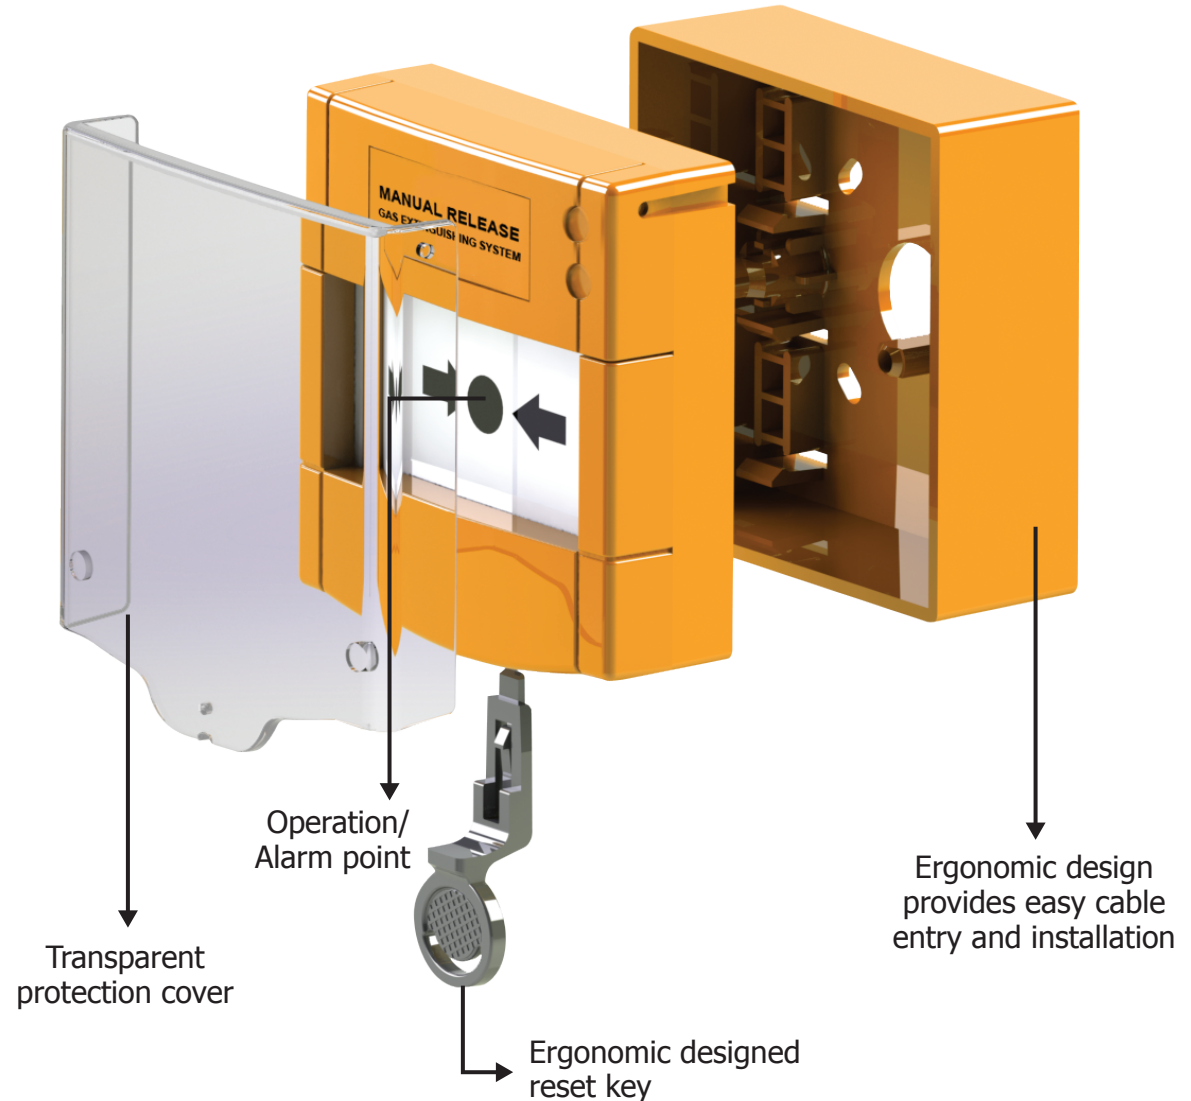

Aesthetic design, easy montage and use...


**TECHNICAL SPECIFICATION**

<b>Operating Voltage:</b>	10 - 30V DC
<b>Quiescent / Alarm Current:</b>	0A / 60 mA max.
<b>IP Protection Class:</b>	IP22D
<b>Color:</b>	Yellow
<b>Weight:</b>	140 gr
<b>Weight:</b>	87 x 91 x 58 mm
<b>Operating Temperature:</b>	(-10°C) - (+55°C)
<b>Storage Temperature:</b>	(-30°C) - (+60°C)
<b>Relative Humidity:</b>	%0-95

**MODELS**

Product Code	Description
ML-2710.MR	Maxlogic Extinguishant Manual Release Button

**CABLE CONNECTION**

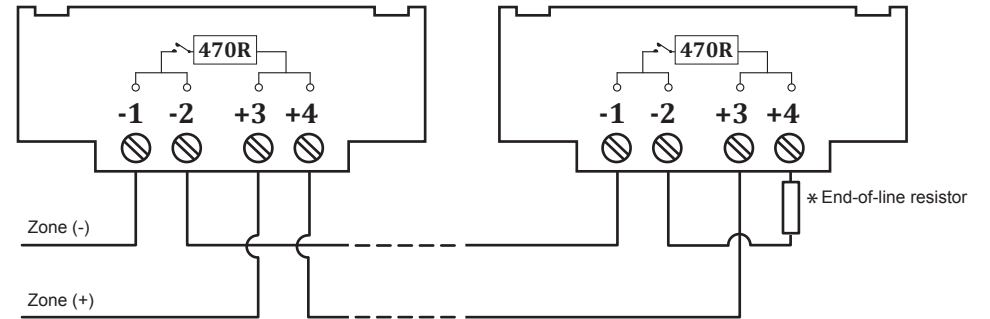

\* Resistor value is mentioned on panel. (MG / ML - 6K8)

**Against to fire hazards, protecting your life and properties is serious principle for Mavili Elektronik. Mavili Elektronik has been generating confidence for since 1987.**