

MG-5400

MAVIGARD FIRE ALARM BELL


MG-5400 Fire alarm bell is a product that can be used by all systems from intelligent addressable fire alarm systems with Mavigard and Maxlogic brands to conventional fire alarm systems. It gives an audible output when generating a warning signal in fire alarm panels. Special design for indoor use. Compatible with EN 54-3.



TECHNICAL SPECIFICATIONS

Supply Voltage	24V DC
Operating Current	20mA
Audible Warning	92dB/m (A)
Operating Temperature	(-10°C)-(+55°C)
Storage Temperature	(-30°C)-(+60°C)
Relative Humidity(non-condensed)	%95 (+40°C non-condensed)
Power	1,2W (max.)
Dimensions (base included)	Ø:150
Weight (base included)	610g
IP Protection Class	IP51

CONNECTION DIAGRAM

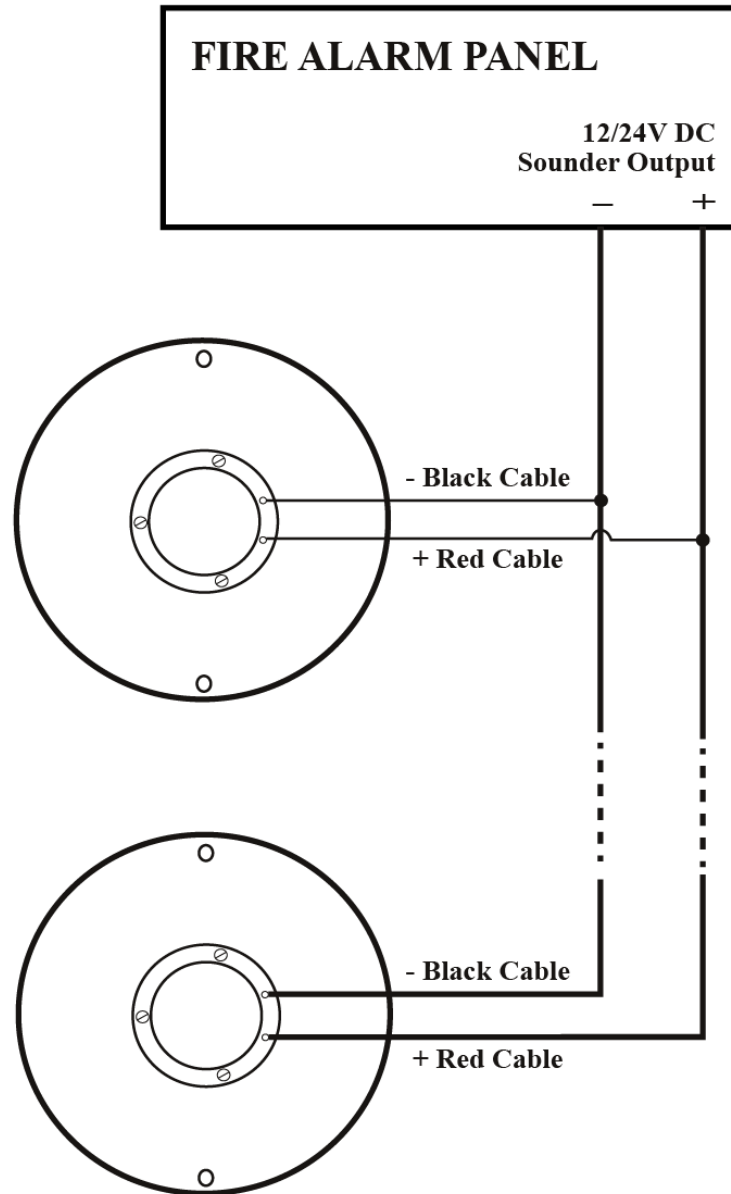

* When the product is used with Maxlogic / Mavigard brand fire alarm control panels, the last sounder should be ended with 10 K Ω end of line resistance.